



UPIT / NARUDŽBA RAZDJELNIKA

Jednokomorni razdjelnici



JEDNOKOMORNI RAZDJELNICI HVE 80 ... HVE 500

Ver. 2007-00

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001/2000 =

VELIČINA KOMORE	PRIKLJUČCI	PROTOK TOPLE VODE	TOPLINSKA SNAGA pri $\Delta t=20^{\circ}\text{C}$
<input type="checkbox"/> 80do DN 50do 8,5 m ³ /hdo 195 kW
<input type="checkbox"/> 100do DN 65do 14 m ³ /hdo 320 kW
<input type="checkbox"/> 120do DN 80do 19 m ³ /hdo 430 kW
<input type="checkbox"/> 160do DN 125do 49 m ³ /hdo 1100 kW
<input type="checkbox"/> 200do DN 150do 72 m ³ /hdo 1650 kW
<input type="checkbox"/> 250do DN 200do 120 m ³ /hdo 2700 kW
<input type="checkbox"/> 300do DN 250do 190 m ³ /hdo 4300 kW
<input type="checkbox"/> 350do DN 300do 270 m ³ /hdo 6100 kW
<input type="checkbox"/> 400do DN 300do 270 m ³ /hdo 6100 kW
<input type="checkbox"/> 450do DN 350do 330 m ³ /hdo 7400 kW
<input type="checkbox"/> 500do DN 400do 430 m ³ /hdo 9800 kW

Duljina razdjelnika = mm

Maksimalni pretlak = bar

Max. temperatura polaza = °C

Izolacija sa oplatom od pocinčanog lima

polistiren 35mm (samo kod HVE 80)

mineralna vuna 50mm

mineralna vuna 100mm

Zidni nosač



A = mm

(Za HVE 80...120:

A=160 ili 220mm)

Podni nosač

H = mm

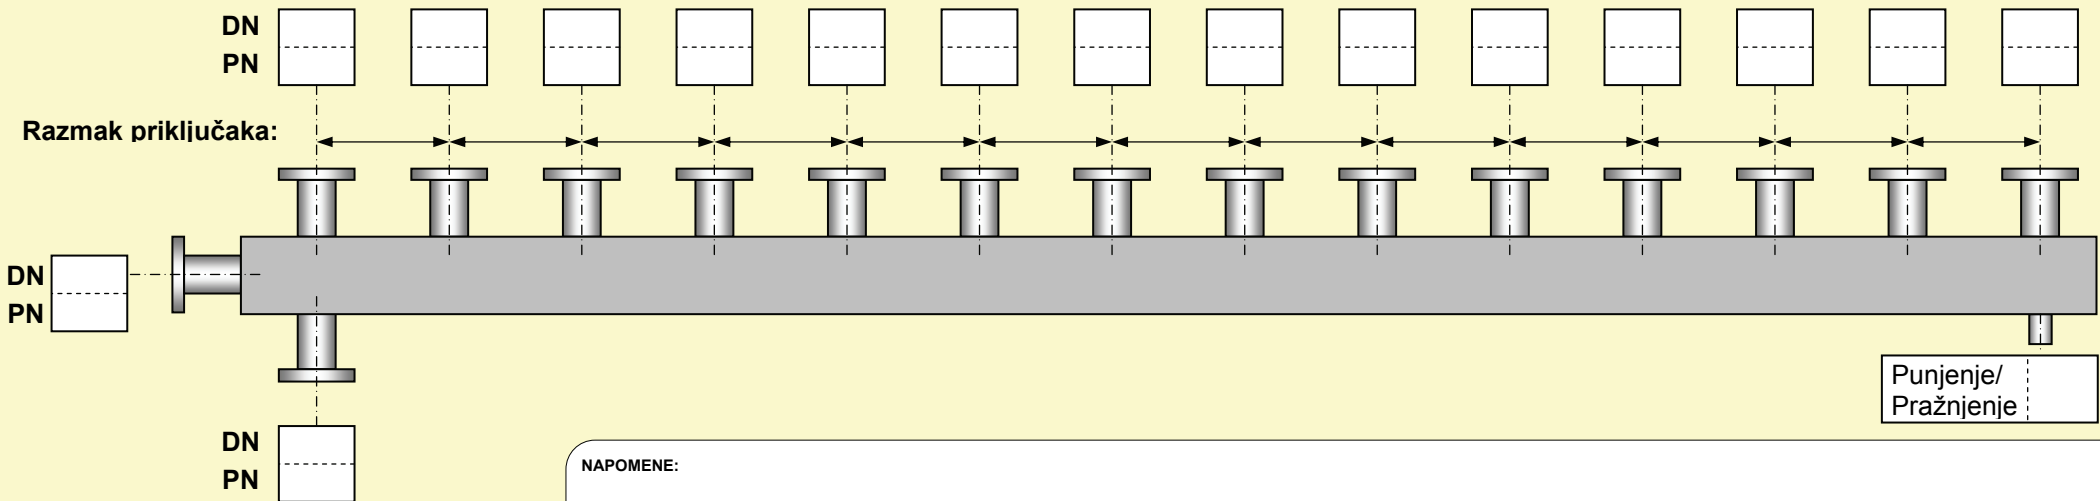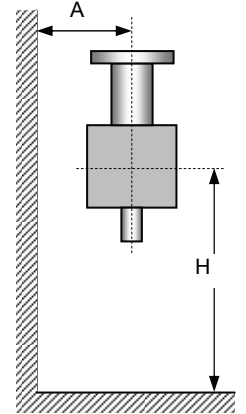

NAPOMENE: